

flexCL®


OPTIMAL FOR ACOUSTIC INSULATION AND DRY CONSTRUCTION.




The highly adaptable, high-performance and easy to apply insulating material for acoustic insulation requirements closely fits the stud shapes, thus preventing acoustic bridges. The compact material structure and high absorption ensure maximum acoustic protection. The flexible insulating batt offers very good moisture control within the building element, effectively utilising the cavity behind interior claddings.

YOUR INSULATION ADVANTAGES AT A GLANCE:

- Manufactured from newspaper
- Uniformly cross-linked in three dimensions
- Friction fit width up to 1100 mm possible
- Flexible, extremely adaptable, will bend
- Vapour permeable

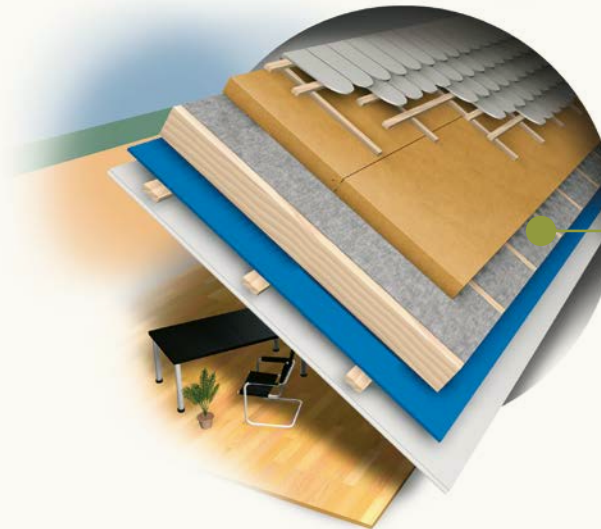

flexCL®

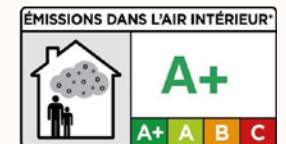

Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions)



