





## Hammer-in anchor with plastic nail

Fastening of insulation boards (without ETA-approval)

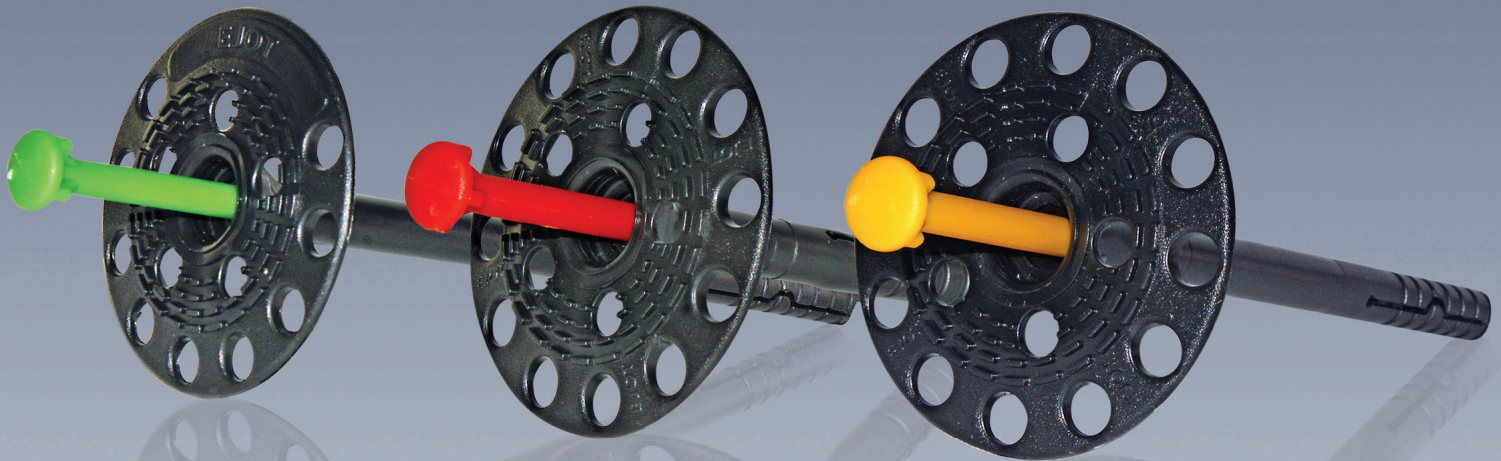

### Installation

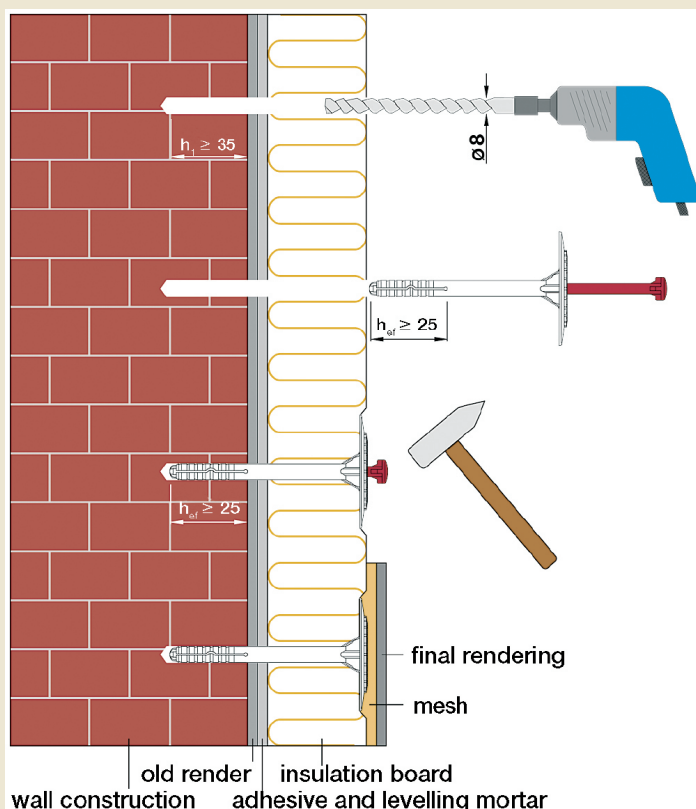

### Advantages

- Safe anchoring in concrete and solid masonry
- Can be used with an additional spreader washer
- Coloured moulding to distinguish the various lengths
- Premounted nail for quick installation
- Manufactured from high grade plastic



## Hammer-in anchor with plastic nail

Fastening of insulation boards (without ETA-approval)

### Technical Data

Anchor diameter	8 mm
Washer diameter	60 mm
Drill hole depth $h_1 \geq$	35 mm
Embedment depth $h_{ef} \geq$	25 mm
Point thermal transmission	0,000 W/K

### Recommended Use Loads



Concrete	0,15 kN
Clay bricks	0,15 kN
Solid lime sandstone	0,15 kN



### Product Range

Insulation (mm)		Product name and length (mm)	Colour of nail	Product Code	Packaging (pieces)	Pallet Unit (pieces)
New build <sup>1)</sup>	Renovation <sup>2)</sup>					
40	20	EJOT IDK-N 8/60 x 075	Red	8546 075 156	200	8,000
60	40	EJOT IDK-N 8/60 x 095	Beige	8546 095 156	200	6.000
80	60	EJOT IDK-N 8/60 x 115	Yellow	8546 115 156	200	6.000
100	80	EJOT IDK-N 8/60 x 135	Light Green	8546 135 156	200	5.400
120	100	EJOT IDK-N 8/60 x 155	White	8546 155 156	200	3.600
140	120	EJOT IDK-N 8/60 x 175	Orange	8546 175 156	200	3.600

1) 10 mm adhesive 2) 10 mm adhesive and 20 mm old render

Note: Anchor without European Technical Approval (ETA).